

## **K 2506 SL**

51000134


### **Technical data**

<b>Travel speed</b>	<b>German traffic regulations 80 km/h</b>	<b>40-80 km/h</b>	<b>25 km/h</b>	<b>10 km/h</b>	<b>1 km/h</b>
<b>Payload</b>	51.000 kg	75.000 kg	120.000 kg	153.000 kg	195.000 kg
<b>Dead weight</b>	21.000 kg				
<b>Total weight</b>	72.000 kg	96.000 kg	141.000 kg	174.000 kg	216.000 kg
<b>Axle load</b>	12.000 kg	16.000 kg	23.500 kg	28.000 kg	36.000 kg
<b>Platform dimensions</b>	approx. 9.000 x 3.000 mm				
<b>Coupling length</b>	approx. 9.000 mm				
<b>Platform height center</b>	approx. 1.175 mm				
<b>Axle compensation</b>	approx. +/- 300 mm				
<b>Platform height lowered</b>	approx. 875 mm				
<b>Steering / steering angle</b>	hydraulical-mechanical / approx. +/- 60°				
<b>Number of Wheel bogies / braked</b>	12 / 12				
<b>Brake performance</b>	522 kN				
<b>Tyres</b>	48 x 215/75 R17,5TL				
<b>Oiltank volume</b>	75 l				
<b>Bending resistance of platform</b>	approx. 7.000 kNm				
<b>Operating temperature</b>	approx. -20°C up to +45°C				

The multifunctional transportation system for payloads up to 5 000 tons

## **K 2506 SL**

51000134

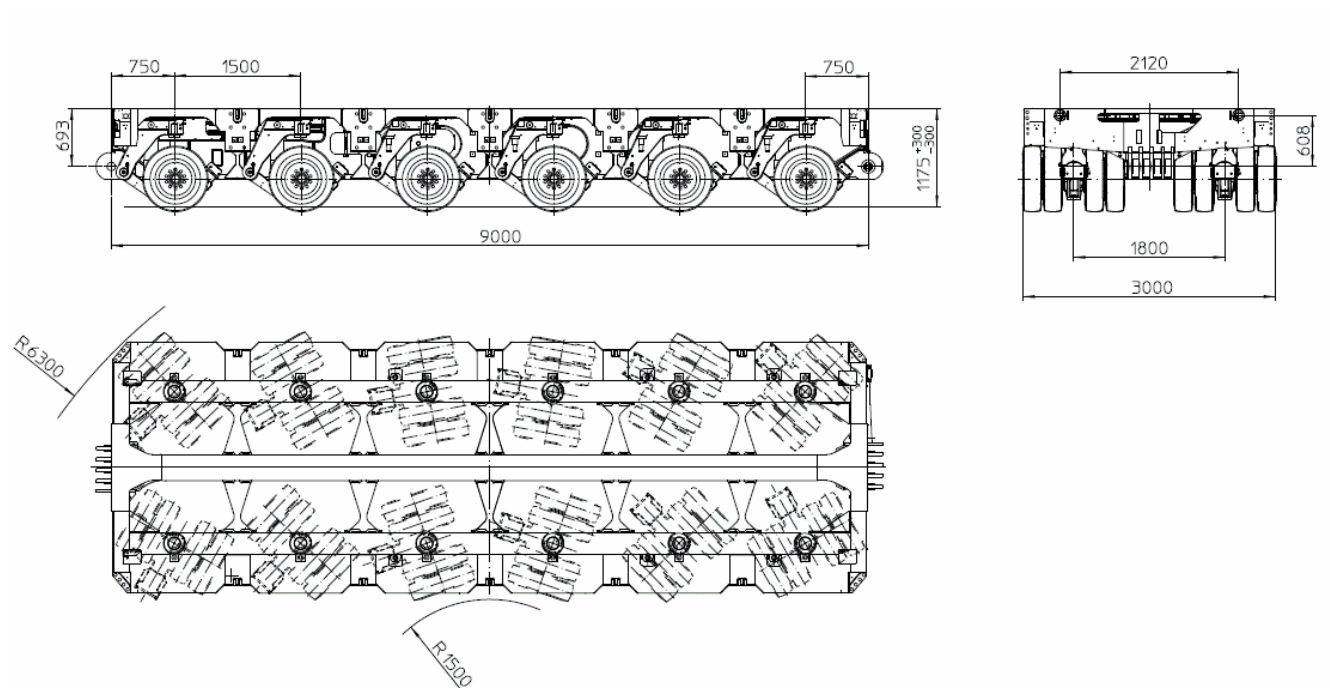

### **Standard accessories:**

- 1 set of coupling hoses end to end
- 1 hydraulic coupling bolt