


1M

1M

5M



5M

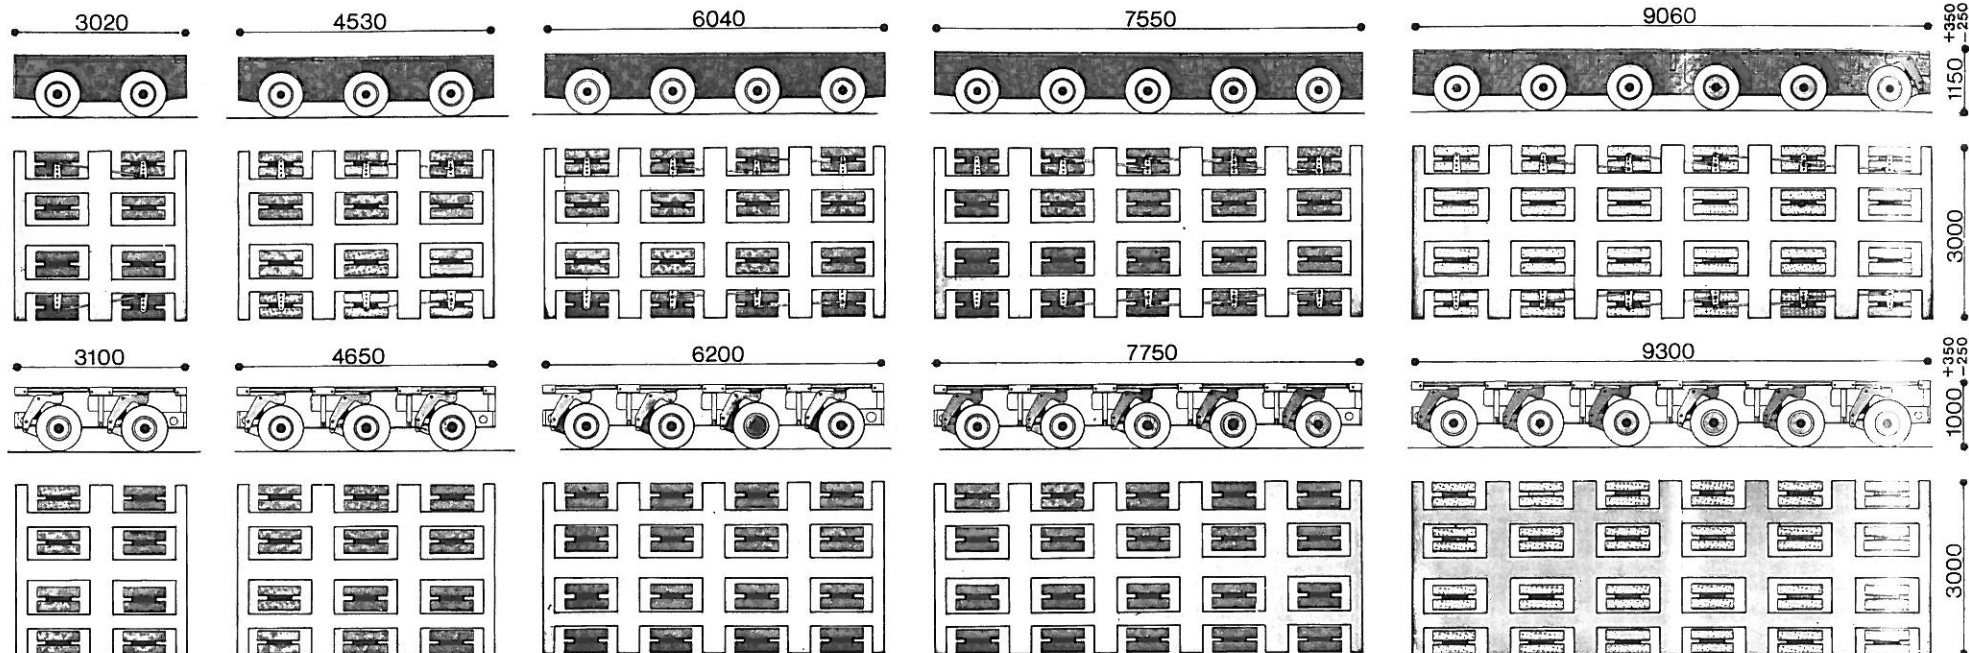

TYPE	
AXLE ROWS	
TYRES: 7.50x15 16 P.r. N°	
AXLE SPACING mm.	
OVERALL WIDTH mm.	
PLATFORM LENGTH mm.	
PLATFORM HEIGHT mm.	
PAYLOADING CAPACITY TONNES	5 Km/h
	25 Km/h
	40 Km/h
	62 Km/h
GROSS WEIGHT TONNES	5 Km/h
	25 Km/h
	40 Km/h
	62 Km/h
* TURNING RADIUS mm.	INSIDE
	OUTSIDE

21 M	31 M	41 M	51 M	61 M
2	3	4	5	6
16	24	32	40	48
1510				
3000				
3020	4530	6040	7550	9060
1150 + 350 - 250				
49.5	74.5	99.8	125	150
37.5	56.5	75.8	95	114
33.5	50.5	67.8	85	102
29.5	44.5	59.8	75	90
56	84	112	140	168
44	66	88	110	132
40	60	80	100	120
36	54	72	90	108
1 600	3 500	4 850	6 200	7 700
5 700	8 200	10 200	12 100	14 200

25 M	35 M	45 M	55 M	65 M
2	3	4	5	6
16	24	32	40	48
1550				
3000				
3100	4650	6200	7750	9300
1000 + 350 - 250				
49	74.1	99	124	149
37	56.1	75	94	113
33	50.1	67	84	101
29	44.1	59	74	89
56	84	112	140	168
44	66	88	110	132
40	60	80	100	120
36	54	72	90	108
1 600	3 500	2 700	2 700	4 200
5 700	8 200	7 100	7 100	9 200

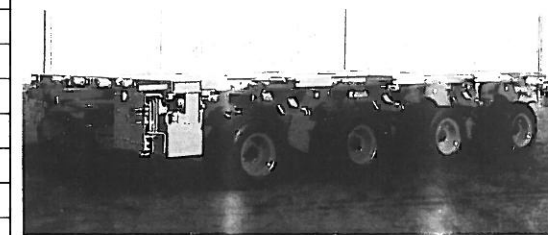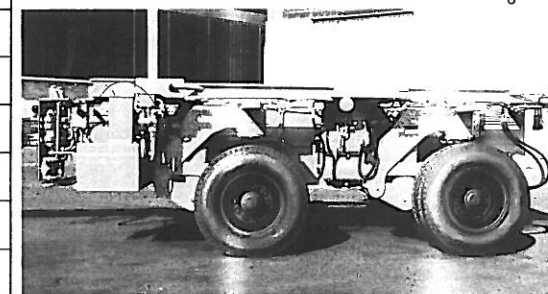

* These data are referred to a basic module equipped with a steering header.
Remarks: All the basic units may be even supplied as half modules (i.e. modules split in two halves along their longitudinal axis). The above data remain unchanged